Part #500616-001

Product Manual:

Model #BC-14S
Adjustable Anchor Clamp

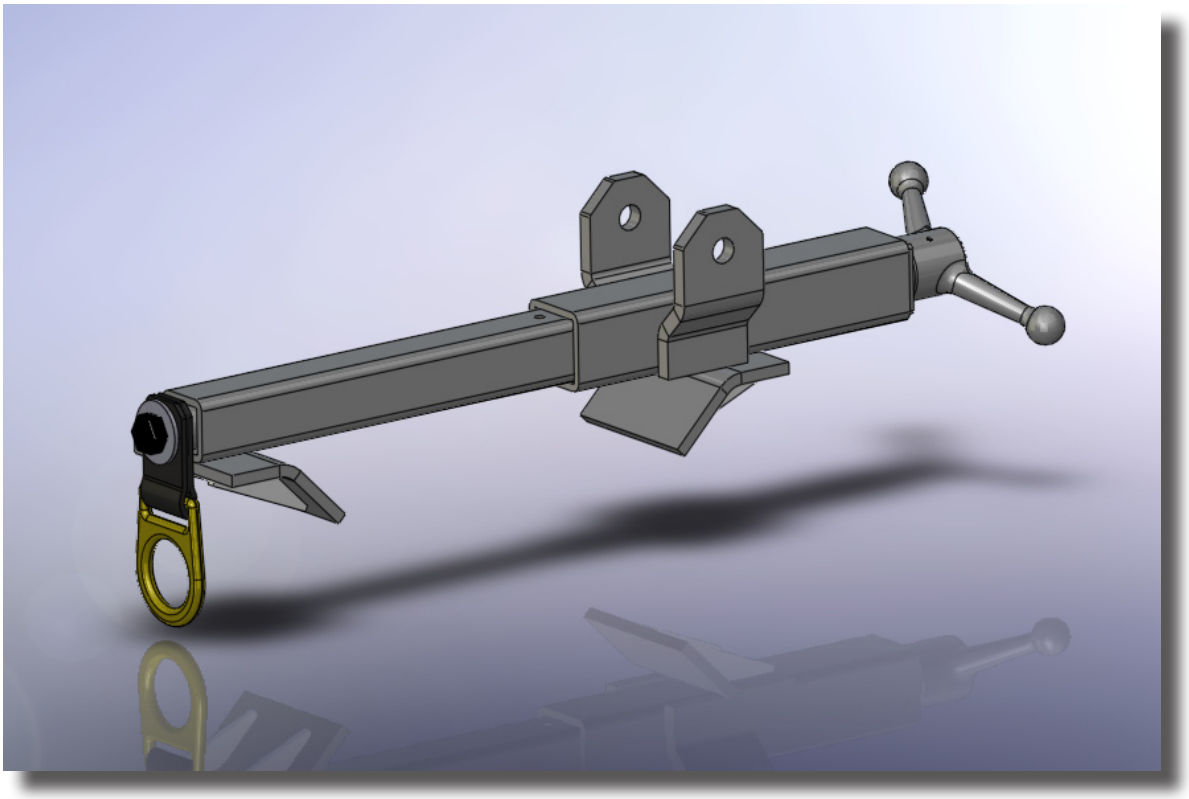

PELSUE®
ISO 9001 Certified

T.A. Pelsue Company
2500 South Tejon Street
Englewood, Colorado, USA 80110
Tel. 800-525-8460 or 303-936-7432
Fax. 303-934-5581
Internet: www.pelsue.com
Email: sales@pelsue.com

PELSUE®

TRADITION+INNOVATION

ISO 9001 Certified

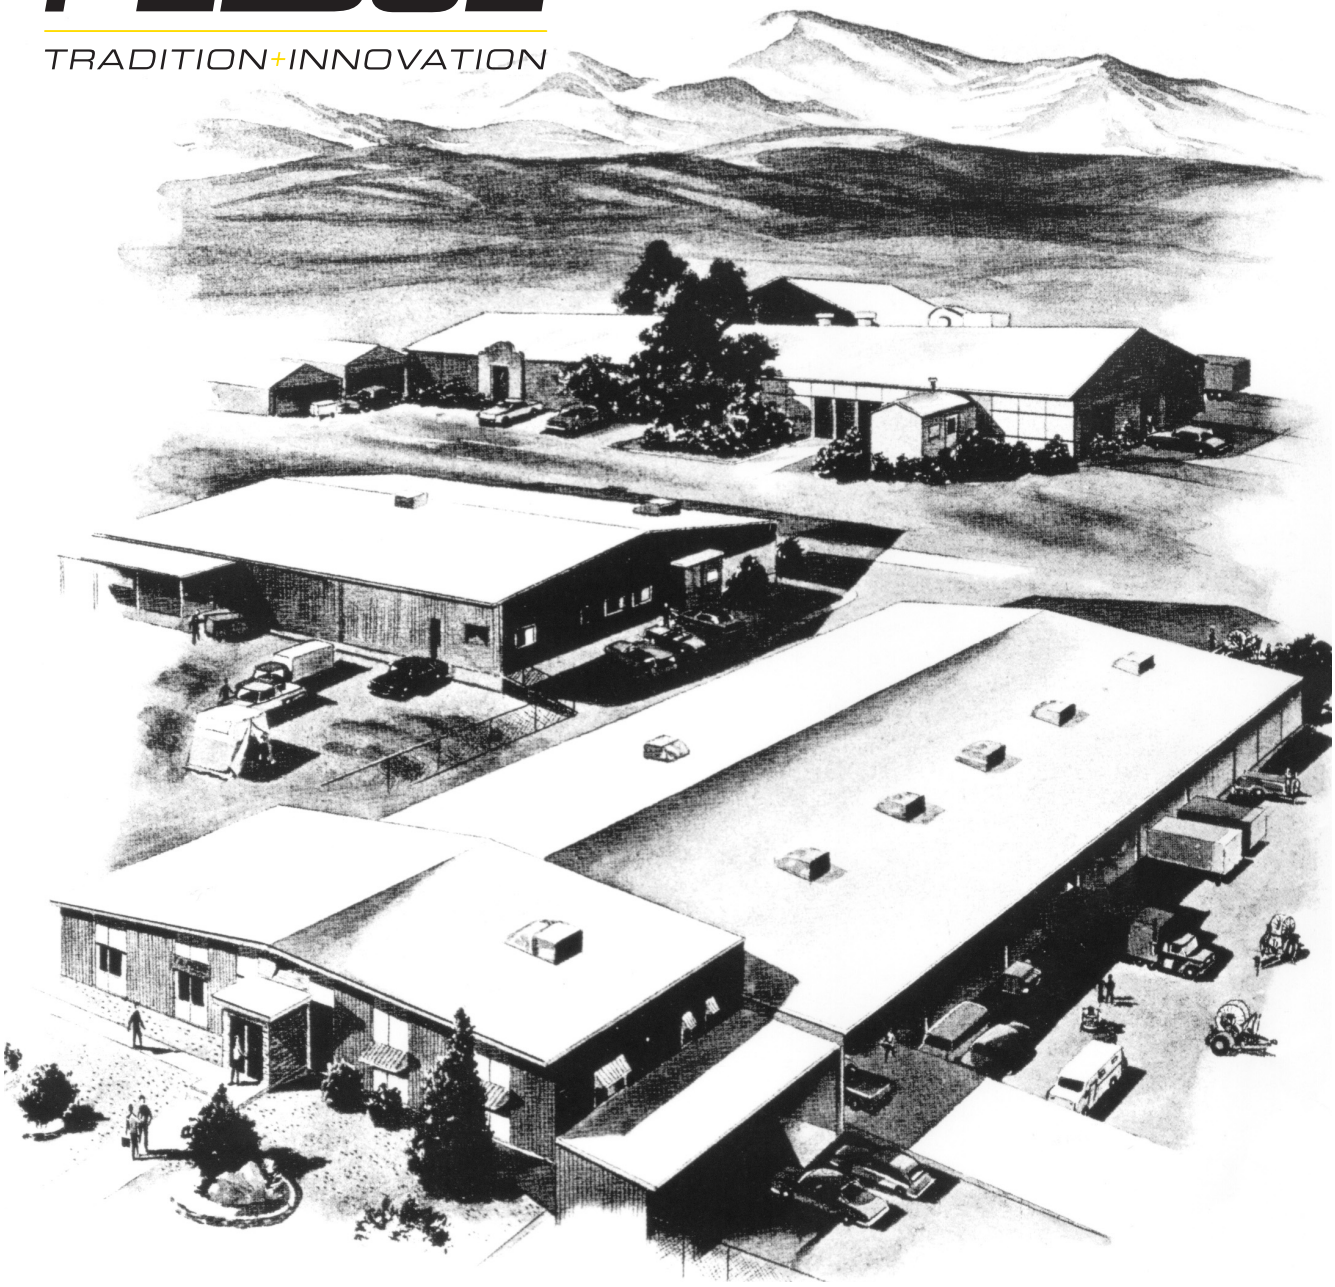

Since our inception in 1963 – the T.A. Pelsue Company has designed and manufactured high quality equipment to improve the personnel efficiency and working conditions in various underground, confined, and outdoor areas.

Founded by T. Allen Pelsue, the company has established a continuing reputation for excellence in the production of fine products for a broad spectrum of industry throughout the world.

Now, in our second generation of family direction, continued commitment to innovation and quality makes Pelsue a leading source of equipment for many types of confined spaces. We specialize in safety, retrieval, fall arrest, ventilation, cable placing, splicing, and maintenance nationally and abroad. With more than 70,000 square feet of facilities available, Pelsue continues the dedication that has made us pre-eminent in this field.

Table of Contents

Section	Description	Page #
1.0	**General Information**	**5**
1.1	Quality Policy	
1.2	Pelsue Product Warranty	
2.0	**Introduction & Product Information**	**7**
2.1	Serial Number	
3.0	**Configuration & Assembly**	**8**
4.0	**Safety**	**9**
4.1	Warning Statement	
4.2	Safety Alert Symbol	
4.3	General Safety Information	
4.4	Operating Safety	
4.5	Maintenance Safety	
4.6	New Operator Safety Information	
5.0	**Product Operation**	**12**
5.1	Product Description & Capabilities	
5.2	Product Installation & Set-Up	
6.0	**Maintenance & Inspection**	**16**
6.1	Maintenance	
6.2	Inspection	
6.3	Inspection Log	
7.0	**Storage**	**19**
8.0	**Contact Information**	**19**

T.A. Pelsue Company

Quality Policy

OUR GOAL IS THE PURSUIT OF NEVER-ENDING IMPROVEMENT IN PRODUCT QUALITY AND BUSINESS SYSTEMS.

METHODS TO BE EMPLOYED IN ATTAINING THIS GOAL WILL INCLUDE NEW PRODUCT QUALITY PLANNING, EMPLOYEE TRAINING, AND UTILIZATION OF EMPLOYEE INVOLVEMENT GROUPS TO SOLVE PROBLEMS.

IN AN INCREASINGLY COMPETITIVE MARKETPLACE, ENSURING CUSTOMER SATISFACTION IS ONE OF THE DIFFERENTIATORS THAT SETS YOU APART FROM THE PACK AND YIELDS A COMPETITIVE ADVANTAGE.

THEREFORE, WE WILL SUPPORT TOTAL CUSTOMER SATISFACTION BY IMPLEMENTING THE **ISO 9001 QUALITY SYSTEM** AND PROVIDING THE NECESSARY ATMOSPHERE AND TRAINING TO NURTURE THIS CONCEPT THROUGHOUT OUR ORGANIZATION.

WE WILL MAKE EVERY BUSINESS DECISION AS THOUGH THE QUALITY OF THE PART OR SERVICE PROVIDED WAS DESTINED FOR OUR OWN OR OUR FAMILY'S USE. WE WILL ALWAYS THINK **QUALITY FIRST.**

EVERY T.A. PELSUE COMPANY EMPLOYEE IS EXPECTED TO COMMIT TO THIS PHILOSOPHY IN THE PERFORMANCE OF HIS OR HER DAILY TASKS.

QUALITY FIRST!

T.A. PELSUE COMPANY SENIOR MANAGEMENT TEAM

1.2 - Pelsue Product Warranty

Pelsue products are designed and engineered to perform as stated in published specifications. Quality materials and workmanship are used in the manufacture of this product. With regular maintenance and proper care, Pelsue equipment provides many trouble free hours of operation.

The T.A. Pelsue Company warrants to the buyer that the Hoist Product furnished will conform to specifications and will be free from defects in material and workmanship from the date of shipment to the original buyer, for a period of 3 months (90 days). In the event of failure of any components of a Pelsue product within the warranty period, service must be pre-approved by the T.A. Pelsue Company, and service must be performed by the T.A. Pelsue Parts and Service Department in Englewood, Colorado, or at the option of the T.A. Pelsue Company, service may be performed at any designated service center, which may include any authorized service center for the component manufacturer. Unauthorized repairs will not be covered by this warranty.

Damage or failure due to misuse, mishandling, or unauthorized modifications will not be covered by this warranty. Unless otherwise agreed, the T.A. Pelsue Company shall repair or replace the defective components within (30) calendar days of notice of failure. T.A. Pelsue Company's obligation hereunder, shall be limited to the repair or replacement of the product or component as set forth above and shall not include any liability whatsoever for damages caused by such failure, including, but not limited to consequential or incidental damages flowing from use or lack of use of product.

Any replacement, repair, modification, installation, or other service performed by the T.A. Pelsue Company shall be warranted by the remainder of the unexpired period of the warranty, or for a period of (90) calendar days, whichever is longer.

All materials or parts returned for credit or warranty shall be returned only with prior approval, and will be subject to factory inspection before credit is allowed, Parts claimed defective will be replaced upon request and will be invoiced as purchased, subject to credit when the parts claimed to be defective have been received and examined by the factory.

This warranty is expressly in lieu of all other warranties expressed or implied, including any warranties of merchantability or warranties of fitness for any particular use and all other obligations or liabilities in connection with the sale of this equipment.

T.A. Pelsue Company, 2500 South Tejon Street, Englewood, Colorado 80110, 800-525-8460

2.0 - Introduction & Product Information

Congratulations on your choice of a ***Pelsue Model #BC-14S Adjustable Anchor Clamp*** to compliment your fall arrest system. This equipment has been designed and manufactured to exceed fall arrest requirements and regulations in order to meet the needs of the discriminating operator for the efficient and safe working conditions of personnel upon an elevated working surface.

Safe, efficient and trouble-free operation and maintenance of the system requires that anyone who will be operating, maintaining, or inspecting the equipment, read, understand and follow all the operation, safety, maintenance, and inspection instructions contained within this manual. This manual covers the Pelsue Model #BC-14S Adjustable Anchor Clamp. Use the Table of Contents as a guide to find specific information.

Keep this manual handy for frequent reference and to pass on to new operators. Establish a regular training program for experienced and new operators per this manual. Establish a regular maintenance and inspection program to keep the equipment in top condition.

⚠ WARNING

This product is a part of a complete Fall Arrest system. The user must read, understand and follow the instructions contained in this manual for each component or total system before using this equipment. Establish an appropriate training, maintenance and inspection program for your people and the equipment. Failure to follow these instructions could result in serious injury or death.

2.1 - Serial Number

Product Serial Number

Always give your dealer the serial number of your Pelsue Fall Arrest product when ordering parts or requesting service or other information.

The serial number decal is permanently embossed with a serial number. The serial number decal will appear as shown in *Figure 2a* at the right and is located on the side of the outer tube (see *Figure 2b*). A space has been provided below for the recording of the serial number for future reference.

S/N# _____
MODEL# _____
DOM _____

Figure 2a:
Serial Number Decal

MODEL: ***#BC-14S***

Serial Number :_____

Date of Manufacture (DOM):_____

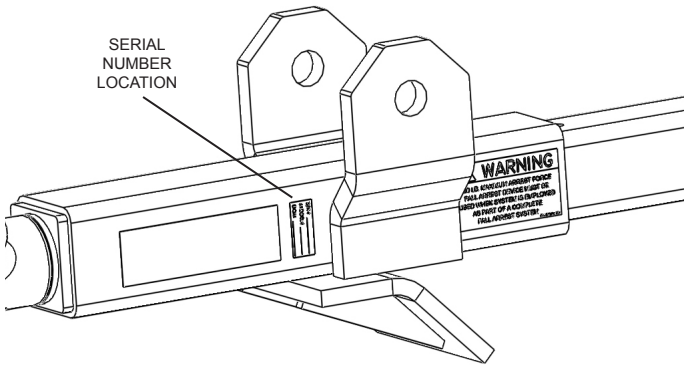

Figure 2b:
Serial Number Decal Location

3.0 - Configuration & Assembly

Upon initial receipt of the #BC-14S system, inspect the packaging for any evidence that the product may have been damaged in shipment. While unpacking the product, inspect all of the components for damage. If damage to any of the components is discovered, DO NOT USE THE PRODUCT! Alert the shipping carrier immediately of the damage to the shipment.

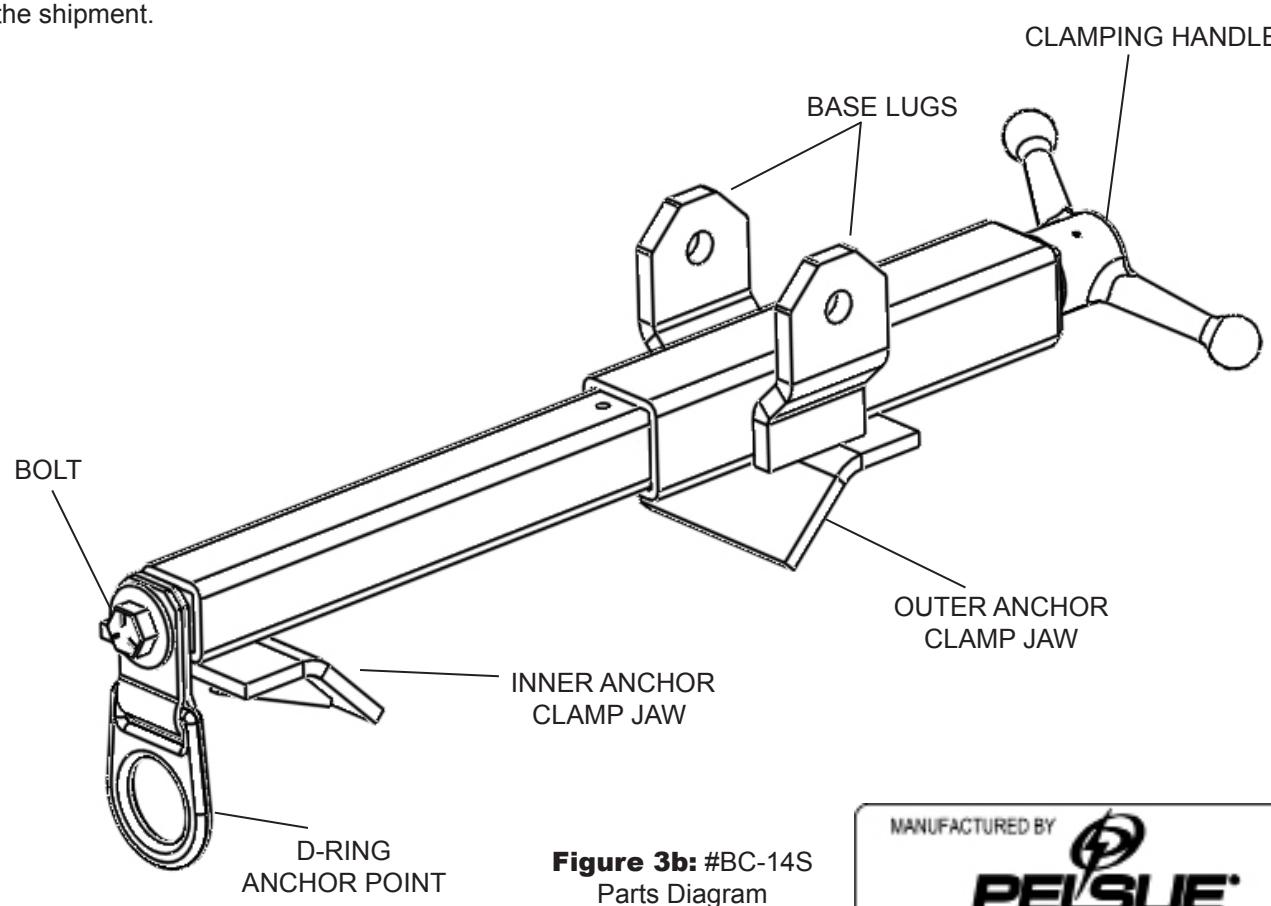

Figure 3b: #BC-14S
Parts Diagram

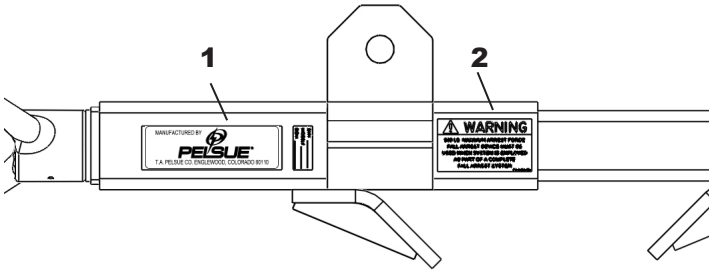

Figure 3b: #BC-14S
Label Location

1) 102072-002

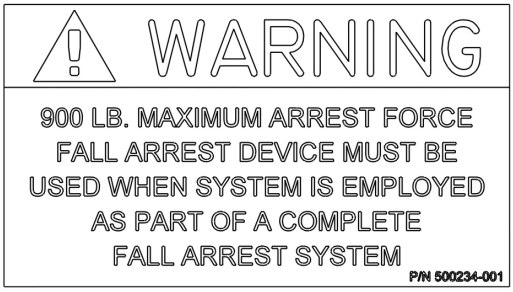

2) 500234-001

Verify that all parts are present before product use.

The #BC-14S is shipped fully assembled.

1. Ensure that the product has been shipped with all the necessary components and is in working order (Refer to Fig. #3b)

**Refer to parts list above if replacement parts are required. Replacement parts can be ordered from the T.A. Pelsue Company at 800-525-8460.

4.0 - Safety

The following section will address the safety precautions which must be adhered to when working with Pelsue Fall Arrest equipment such as the #BC-14S Adjustable Anchor Clamp. Any user must familiarize themselves with the information in this section before utilizing the equipment.

SIGNAL WORDS:

Note the use of the signal words **DANGER**, **WARNING** and **CAUTION** with the safety messages. The appropriate signal word for each message has been selected using the following guidelines:

DANGER- Indicates an imminently hazardous situation that, if not avoided, will result in death or serious injury. This signal word is to be limited to the most extreme situations or for hidden or unseen hazards.

WARNING- Indicates a potentially hazardous situation that, if not avoided, could result in death or serious injury and includes obvious and hidden hazards. It may also be used to alert against unsafe practices.

CAUTION- Indicates a potentially hazardous situation that, if not avoided, may result in minor or moderate injury. It may also be used to alert against unsafe practices.

You are responsible for the safe operation, maintenance and inspection of your Pelsue #BC-14S Adjustable Anchor Clamp. You must ensure that anyone who will operate, maintain, inspect or work around the equipment be familiar with the operating and maintenance procedures and related safety information contained in this manual. This manual will take you step-by-step through the workings and capabilities of the #BC-14S Adjustable Anchor Clamp and alert you to all good safety and operating practices while using the system.

Remember, you are the key to safety. Good safety practices not only protect you but also the people around you. Make these practices a working part of your safety program. Be certain that everyone operating this equipment is familiar with the procedures recommended and follows safety precautions. Remember, most accidents can be prevented. Do not risk injury or death by ignoring good safety practices.

- System owners must give operating instructions to operators or employees before allowing them to use the equipment and at least annually thereafter.
- The most important safety device on this equipment is a safe operator. It is the operator's responsibility to read and understand all safety and operating instructions in the manual and to follow these. Most accidents can be avoided.
- A person must understand the operation of this equipment and be trained in it's usage before operating the equipment. An untrained operator exposes himself and others to possible serious injury or death.
- Do not modify the equipment in any way. Unauthorized modification may impair the function and/or safety and could affect the life of the equipment.
- Think SAFETY! Work SAFELY!

4.1 - Warning Statement

WARNING!

Products manufactured or sold by the T.A. Pelsue Company are intended for use by professionals trained and experienced in the use, inspection and maintenance of these products.

Paraprofessional users such as volunteer rescue workers and sportsmen involved in risk sports such as climbing and caving will be held to the same standard of experience and training as professionals.

Technical rescue, repelling, climbing and the training involved are hazardous activities. Each situation has its own unique conditions and must be evaluated. Effective risk management comes from experience, proper training and good personal judgement.

⚠WARNING⚠

Failure to read and heed all labels and instructions may result in injury or death. Inspect all components before and after each use, and remove from service if any damage or defect is found. Keep product free from dirt and moisture. Do not leave a suspended load unattended. Do not exceed maximum rated loads.

4.2 - Safety Alert Symbol

SAFETY ALERT SYMBOL

This Safety Alert symbol means **ATTENTION! BECOME ALERT! YOUR SAFETY IS INVOLVED!**

The Safety Alert symbol identifies important safety messages on your Pelsue Retrieval Product and in the manual. When you see this symbol, be alert to the possibility of personal injury or death. Follow the instruction in the safety message.

Why is this symbol important to you?

3 BIG Reasons: **Accidents Disable and Kill.**

Accidents Cost You Money.

Accidents Can Be Avoided.

4.3 - General Safety Information

1. Read, understand, and follow the Product Manual and all safety signs before using, maintaining or inspecting the equipment.
2. Refer to and follow applicable standards and regulations. Comply with requirements of local regulations for your applications.
3. Establish an equipment-use training program for inexperienced employees. Only trained, competent persons shall use the equipment. An untrained operator is not qualified to operate the system.
4. Have a first-aid kit available for use should the need arise and know how to use it.
5. Provide a fire extinguisher for use in case of an accident. Store in a highly visible place.
6. Install and properly secure all guards and shields before operating.
7. Wear appropriate protective gear. This list includes but is not limited to:
   - A hard hat
   - Protective shoes with slip resistant soles
   - Heavy gloves
   - Protective clothing
   - Face Protection
8. Review and follow the Pre-Operation Checklist before using a component in the system or system itself.
9. Establish a regular maintenance and inspection program with your equipment and maintain detailed records.
10. Review safety related items and operating instructions with all personnel on a regular basis.

4.4 - Operating Safety

1. Read, understand and follow the User Manual and signs on the product before using, maintaining or inspecting the equipment.

2. Train all operators before allowing them to use the product. An untrained operator exposes themselves, bystanders and workers to possible serious injury or death.

3. Visually inspect the product and all auxiliary components and equipment before using. Correct any problems before using the equipment.

4. Securely anchor the product before using.

5. Use only certified anchor and connector components in your system.

6. Use only an approved full body harness for the workers.

7. Always work in teams. One person is to work in the elevated space (entrant) and the other is to attend to the entrant (attendant). Pelsue recommends an additional attendant/rescuer for stand-by in case of an emergency.
8. Do not exceed the capacity of the system at any time (see section 5.1).
9. Establish a regular training program for new and experienced workers.
10. Establish a detailed inspection program for your equipment and document the findings. Return the equipment to the manufacturer for repair if any problems are found.
11. Plan your work program before starting. Have the required people, equipment and procedures available to do the job.
12. Do not use the equipment around physical or environmental hazards. This list includes but is not limited to:
    - Corrosion that may affect the structural integrity of the lifeline or other components.
    - Chemicals which can degrade components in a manner which can not be visually identified.
    - Toxic gases: Rescuers or workers can be killed in toxic environments.
    - Heat or elevated temperatures.
    - Moving machinery: Workers or auxiliary equipment can be contacted by or pulled into moving components.
    - Sharp edges: Workers or the rescue equipment can be injured by or damaged by sharp edges or components.
    - Electrical hazards: Stay away from power lines or components carrying electrical power.
    - Overload: Do not overload the system at any time during operation (see section 5.1).
    - Follow elevated space regulations and standards.

4.5 - Maintenance Safety

1. Read, understand and follow the User Manual and signs on the product before using, maintaining or inspecting the equipment.
2. ANSI and OSHA require a regular inspection program for all elevated fall arrest equipment and to maintain documented results of these inspections. Follow the inspection procedure contained in this manual and use the inspection form to document the results (see section 6.0).
3. Keep instructional and safety signs clean and legible at all times. Clean or replace as required.
4. Remove the equipment from service if a problem is found during the inspection. Return to an authorized repair depot or the factory for service.

4.6 - New Operator or Owner

The Pelsue #BC-14S Adjustable Anchor Clamp is designed as a portable Fall Arrest Anchor Point and Pelsue Fall Arrest Tower Base System. Every new operator must read, understand and follow the instructions in the manual. No one should be allowed to use the equipment without training. The training should be reviewed with experienced operators on a regular basis. At regular intervals, perform a detailed inspection of the equipment and document the results. Remove from service if deficiencies are found. Alterations or misuse of this equipment or failure to follow instructions may result in serious injury or death.

It is the responsibility of the owner's organization or operator to read this manual and to train all other operators before they start working with the equipment. Follow all safety instructions exactly. Safety is everyone's business. By following recommended procedures, a safe working environment is provided for the operator, bystanders and the area around the work site. Untrained operators are not qualified to operate the equipment.

Many features incorporated into this equipment are the result of suggestions made by customers like you. Read this manual carefully to learn how to operate the equipment safely and how to set it to perform as intended. By following the operating instructions in conjunction with a good maintenance program, your product will provide many years of trouble free service.

5.0 - Product Operation

The following section will address the capabilities and the general operation of the Pelsue #BC-14S Adjustable Anchor Clamp. The instructions contained within this section should be adhered to each and every time the product is used. Any person tasked with installing or operating the piece of equipment should be familiar with these procedures.

5.1 - Product Description & Capabilities

The Pelsue #BC-14S Adjustable Anchor Clamp is built from carbon steel with steel hardware. The BC-14S Adjustable Anchor Clamp is specifically designed to provide a portable fall arrest system anchor point and/or a mounting base for a Pelsue Fall Arrest Tower. All specifications, instructions, and procedures provided within this manual or upon Pelsue Specification Documents are based upon and only valid for usage with a Pelsue FT Series Fall Arrest Tower. The T.A. Pelsue Company can not verify equipment safety and/or compliance when utilized with anything other than Pelsue-approved BC-14S complementary products.

General Specifications:

Designed for clamping attachment on structural steel shapes commonly found in industrial locations.

- Minimum Clamped Section Width: 4”
- Maximum Clamped Section Width: 14”
- Product Weight: 31 lbs.

Compliance & Rating:

- **D-Ring Anchor Point:** Compliant as an anchorage for a fall arrest system for one person of 350 LBS (159 KG.) maximum weight when utilized with a 900 LB. MAF Device.
- **Fall Arrest Tower Mounting:** The #BC-14S Base Lugs provide a compliant mounting point for a Pelsue FT Series Fall Arrest Tower when the tower is installed and utilized per the published requirements.

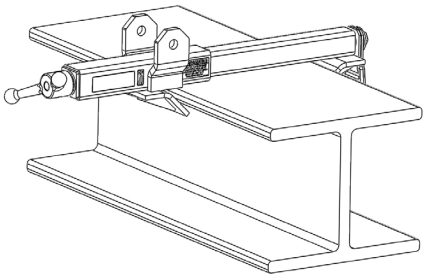

Figure #5.1a: #BC-14S Installed on a Typical Wide Flange Section

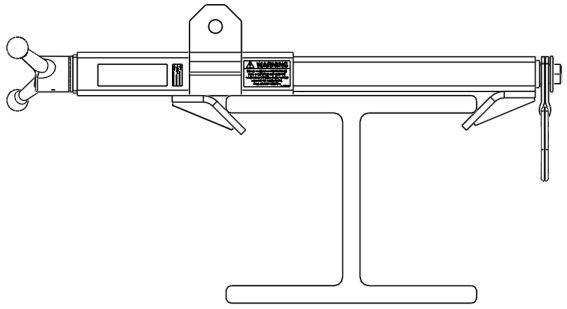

Other Requirements:

- It is the user’s responsibility to ensure that the structure to which the #BC-14S is capable of withstanding the loads imparted to it by a proof-loaded system in order to retain stated compliance. *Refer to the loading diagrams located within this section for required information*
- When utilized in conjunction with an FT Series Fall Arrest Tower, the system must be employed according to the requirements and limitations of both the anchor clamp and the fall arrest tower.

Materials & Construction

- Main Structure - A36 Steel
- Hardware - Plated Steel
- Clamping Screw - SAE Grade 2 Rod

The load ratings presented here may supersede or be superseded by the capabilities of an installed accessory. The rating of a complete fall arrest system can only be rated to the capabilities of its lowest-rated component.

! CAUTION ! - The user must ensure that the beam or structure that the #BC-14S is secured must be capable of withstanding all of the loads imparted to it by the device when proof-loaded.

! CAUTION ! - The user must ensure that the bolt and pins are locked in place in order to retain the stated compliance of the entire system.

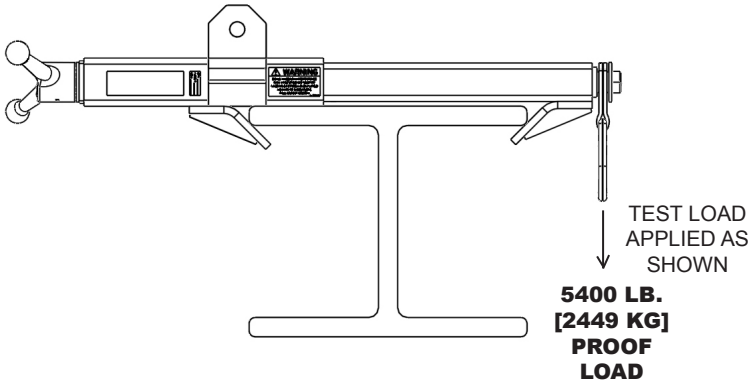

Figure #5.1b: #BC-14S
Loading Diagram: D-Ring Anchor Point

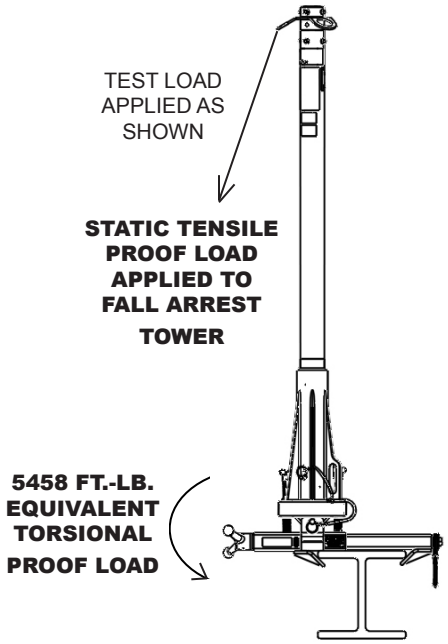

Figure #5.1c: #BC-14S
Loading Diagram: Fall Arrest Tower Mounting via Base Lugs

5.2 - Product Installation & Set-up

Prior to Operation, the #BC-14S Adjustable Anchor Clamp should be configured and prepared according to the following guidelines.

1. Pre-Operation Inspection:

It is necessary to perform a visual inspection prior to each time using the product. If deficiencies are found, remove the product from service and contact the T.A. Pelsue. regarding repair. The following checklist coupled with *Figure #5.2a* should be used as a guide to determine whether the equipment is in good operating condition prior to usage. Equipment that is not in good condition can endanger the safety of the operator's during use.

The Pre-Operation Visual Inspection is not limited to, but must include the following items;

- **a.** Check that the product has no structural defects, such as dents, bends, cracks, or fractures.
- **b.** Ensure that all product rating & warning labels are clear and legible.
- **c.** Check that the sections slide smoothly in and out of each other when clamping and un-clamping (binding can be indicative of a defect).
- **d.** Check that the Anchor Ring is fastened securely and able to rotate smoothly.
- **e.** All hardware has not been damaged and is in working condition.

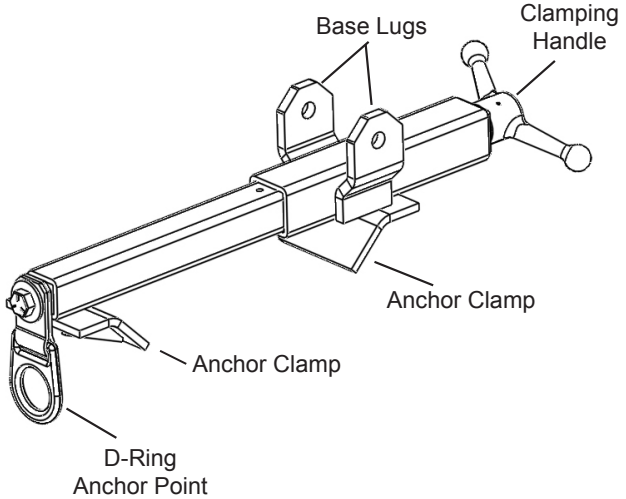

Figure #5.2a: #BC-14S
Pre-Operation Inspection Points

2. Setup of #BC-14S Adjustable Anchor Clamp:

Choose a location where installation will provide suitable proximity to the work area yet minimize obstructions during use and in the event a rescue is necessary.

- ***When utilized as an anchorage for a fall arrest system via the D-Ring Anchor Point:*** The safest installation places the D-Ring connection at approximately the height of the anchored user's shoulders.
- ***When utilized as a Fall Arrest Tower Anchorage:*** Install The clamp so that the tower to be utilized will clear all obstructions yet provide full access to all required work areas within the towers's safe working radius.

***Once a location is chosen, Ensure that the structure to which the clamp will be attached is capable of withstanding all of the forces imparted to it by the loaded device (Refer to the Loading Diagram in Section 5.1).**

a. Turn the Clamping Handle counterclockwise in order to extend the inner tube from the outer tube and pull the outer tubing (Refer to Fig. #5.2b).

b. Continue extending the Anchor Clamp until a point at which the desired installation flange will between the edges of the two clamping jaws, and place the device onto the structure (Refer to Fig. #5.2c).

c. After the clamp has been placed on the structure, ensure that the jaws will fit around the structure and will be able to clamp around the flange unobstructed (Refer to Fig. #5.2c).

d. Push the outer tube jaw adjacent to the flange, and then turn the Clamping Handle clockwise to retract the inner tube jaw thereby clamping the device onto the structure (Refer to Fig. #5.2c).

e. The Clamping Handle should be tightened sufficiently with both hands so as to prevent movement of the device along the structure when loaded (Refer to Fig. #5.2d).

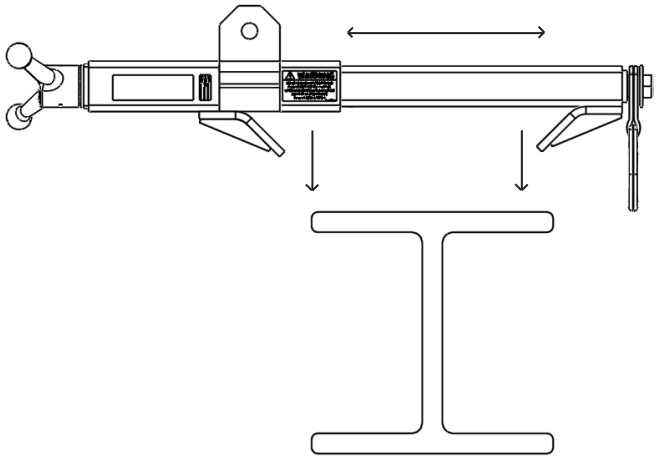

Figure #5.2b: #BC-14S Pre - Installation

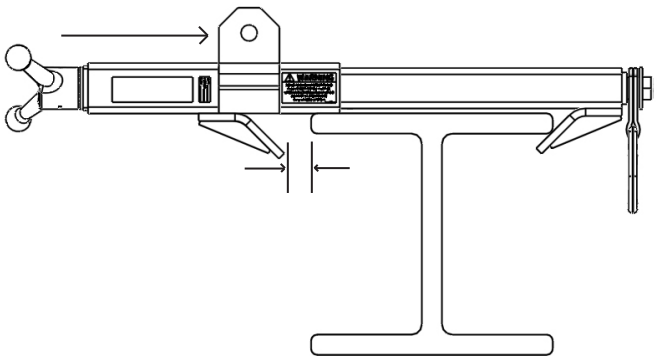

Figure #5.2c: #BC-14S Installation

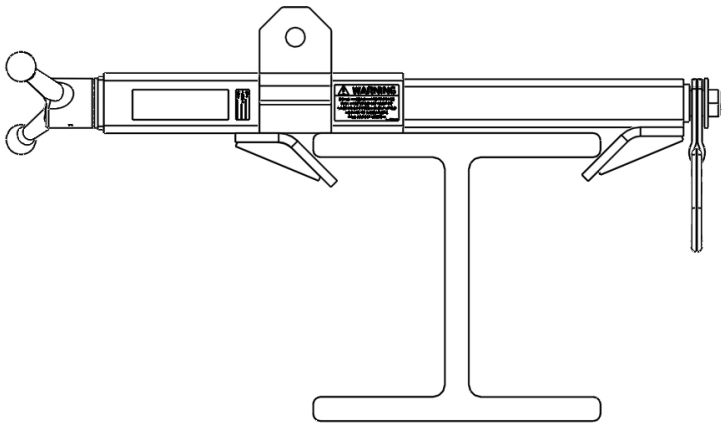

Figure #5.2d: #BC-14S Completely Installed

!WARNING! - It is the user's responsibility to ensure that the structure to which the #BC-14S is attached is capable of withstanding the #BC-14S's reported proof loads for safe installation.

!WARNING! - The user must ensure that the #BC-14S is securely clamped on the selected structure before attaching any lifeline or additional fall arrest system components.

!WARNING! - Any lifeline attached to the #BC-14S D-Ring Anchor Point must utilize a 900 LB. MAF fall arrest device. No lifeline may be attached top the #BC-14S tower base lugs.

3. Installation of an FT Series Fall Arrest Tower on the #BC-14S Anchor Clamp

a. Install the #BC-14S Anchor Clamp per the instructions in Step #2 on the previous page.
b. After the #BC-14S has been completely installed, remove the pin from the base of the fall arrest tower.
c. Place the fall arrest tower onto the #BC-14S, center the base of the tower between the two base lugs present on the anchor clamp (Refer to Fig. 5.2e).
d. Align the holes of the fall arrest tower base with the holes of the base lugs on the #BC-14S and replace the pin from the tower (Refer to Fig. 5.2f).
e. Adjust the levelling pegs in order to place the tower vertically (Refer to Fig. 5.2f).
f. Utilize the installed fall arrest tower within the limits of and according to the instructions provided within the FT Series tower product manual.

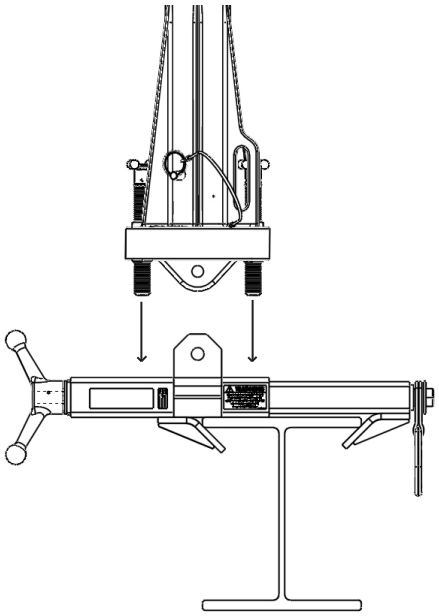

Figure #5.2e: #BC-14S & FT-C70 Installation

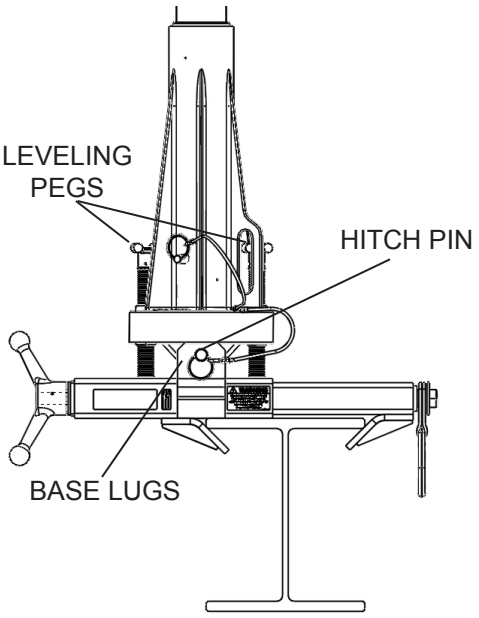

Figure #5.2f: #BC-14S & FT-C70 Installation

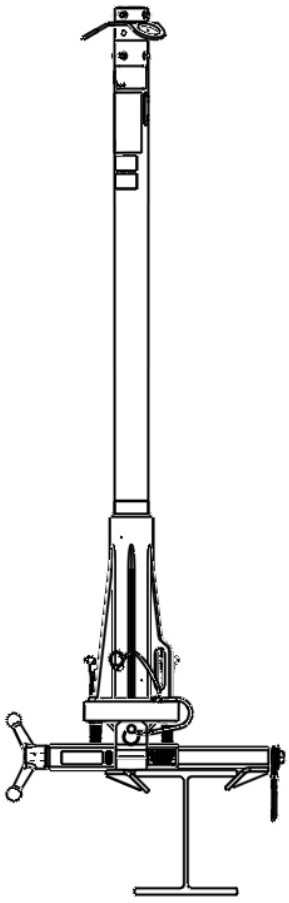

Figure #5.2g: #BC-14S & FT-C70 Completely Installed

!WARNING! - Any FT Series Fall Arrest Tower utilized in conjunction with the #BC-14S Anchor Clamp must be installed according to its product manual, and utilized by a qualified individual in order to be a safe fall arrest system.

!WARNING! - Any FT Series Fall Arrest Tower Attached to the #BC-14S Anchor Clamp must be utilized within its published limits and capabilities. The rating of the installed tower may superseded or derate the capabilities

6.0 - Maintenance & Inspection

⚠ MAINTENANCE & INSPECTION

1. Read, understand and follow the Product Manual and signs on the product before using, maintaining or inspecting the equipment.
2. ANSI and OSHA require a regular inspection program for all elevated fall arrest equipment and to maintain documented results of these inspections. Follow the inspection procedure contained in this manual and use the inspection form to document the results.
3. Keep instructional and safety signs clean and legible at all times. Clean or replace as required.
4. Remove the equipment from service if a problem is found during the inspection. Return to an authorized repair depot or the factory for service.

6.1 - Maintenance

For the most part, the Model #BC-14S is intended to be a maintenance-free piece of equipment, however several steps can be taken to keep the system in top-notch working order and also extend the working life of the product.

Before Each Use:

1. Visual Inspection: Perform a complete visual inspection. Refer to section 6.2 for guidelines and take any maintenance steps that are necessary.

Annually:

1. Clean Product: Use a damp cloth and mild soap to clean the structure and labels of dirt and residue. Be sure the labels are legible (replacements are available from Pelsue)
2. Complete Inspection: Perform a thorough inspection, paying attention to the bullet points provided within section 6.2. Record results and keep documentation. A log has been provided in section 6.3 specifically for the recording of the dates & results of annual system inspections.

Periodic Factory Service Inspection: It is recommended that the product be serviced by a factory authorized service center or the manufacturer after a period of three years. Extreme working conditions may indicate the necessity to increase the frequency. Factory servicing shall include but not be limited to an intensive inspection and cleaning of all internal and external components. Failure to provide proper service may shorten product life and could endanger performance or function.

6.2 - Inspection

When completing an inspection of the Model #BC-14S Adjustable Anchor Clamp, the following specific items should be checked;

1. Labels:

Check that all the labels are clean and legible (Refer to Section 3.0). Clean the labels if any are dirty using mild soap and a damp cloth. Replace if any are illegible. Decals & labels provide valuable warning and caution information applicable to product usage and limitations, and should be visible and present at all times.

2. Anchor Point:

Ensure that the anchor point is securely fastened and that there are no loose parts. Also, visually inspect for any fracture or deformation. Overloading of the system can and will deform and damage the D-Ring Anchor Point. Any Model #BC-14S system exhibiting deformation should be removed from service immediately.

3. Structure:

The entire product structure should be checked for cracks, gouges, dents, bends or breaks. If there are major dents or any other structural damage, the unit should be removed from service and returned to the factory for repair.

- Pay special attention to weld locations: look for cracks or separation at the welds. Keep in mind the zinc plat-

ing can age and scratch, this normal finish scratching can be confused with structural cracking. If there is any uncertainty with regards to cracks, contact the Pelsue service department for assistance and/or recommendations

- Ensure that the two sections of the device can move in and out of each other without obstructions.

4. Clamping Mechanism:

Ensure that the clamping knob extends and retracts the clamp easily and without any binding. If some binding is evident, It may be possible to apply spray lubricant onto the threads of the clamping rod through the inspection hole in the weldment. If after applying lubricant, the clamping structure continuous to bind, remove the product form service immediately. Binding or sticking of the clamping mechanism may be indicative of other structural damage.

Model Number : *#BC-14S*

Serial Number :

Date Purchased :

*Place a check (√) in the box if item is acceptable, place an x **(X)** in the box if item requires maintenance or repair*

Date	Labels	Anchor Point	Structure	Clamping Mechanism	Notes
Inspector (print & sign) :					
Inspector (print & sign) :					
Inspector (print & sign) :					
Inspector (print & sign) :					
Inspector (print & sign) :					
Inspector (print & sign) :					
Inspector (print & sign) :					
Inspector (print & sign) :					
Inspector (print & sign) :					

7.0 - Storage

Prior to storage, the product should be thoroughly inspected and maintained. Repair or replace any worn or damaged components to prevent any unnecessary down time at the next use.

Follow this procedure:

1. Thoroughly clean the entire unit using a mild soap on the frame and labels.
2. Perform a complete inspection of the unit and document the results prior to storage.

8.0 - Contact Information

For More Information...

T.A. Pelsue Company
2500 S. Tejon St.
Englewood, CO 80110

Toll Free: **1-800-525-8460**
Telephone: **1-303-936-7432**
Fax: **1-303-934-5581**

Website: **www.pelsue.com**

Email: **sales@pelsue.com**

PELSUE®

ISO 9001 Certified

T.A. Pelsue Company
2500 South Tejon Street, Englewood, Colorado, USA 80110
Toll free 800-525-8460 or 303-936-7432 Fax. 303-934-5581
Internet: **www.pelsue.com** Email: *sales@pelsue.com*